


4

3

2

1

PART TO BE COMPLIANT WITH DIRECTIVE 2015/863/EU (ROHS) & EC 1907/2006 (REACH) OF THE EUROPEAN PARLIAMENT.			Rev No / ZONE	Date	Change	ECN
1. Max weight Allowed	20 Kg		4	10.11.25	RE-DRAWN.	

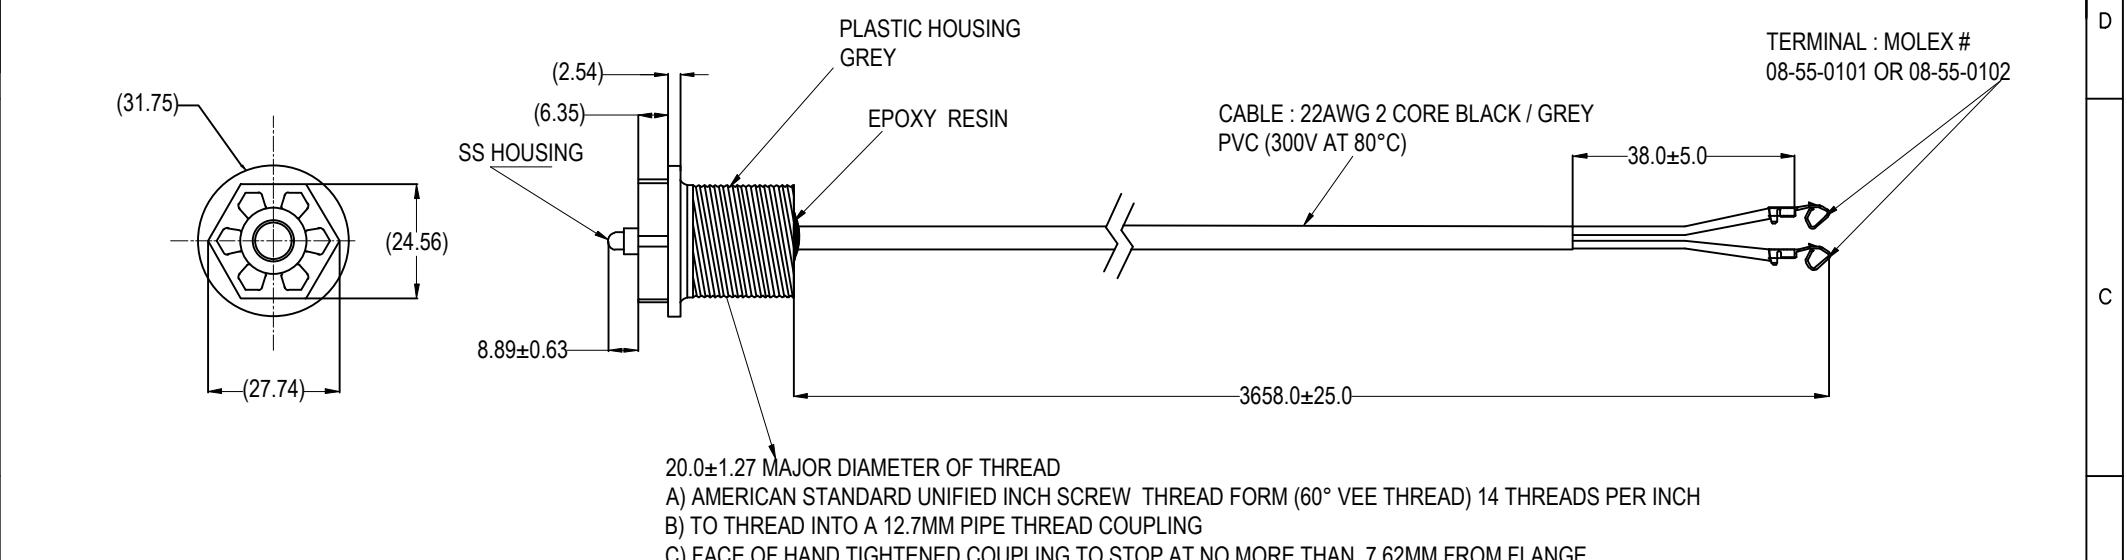


ELECTRICAL SPECIFICATIONS:


1. RESISTANCE AT 25°C	: 30000Ω ± 0.88%
2. RESISTANCE AT 50°C	: 10970Ω ± 0.75%
3. INSULATION RESISTANCE	: MIN 100 MΩ AT 500V dc
4. INSULATION VOLTAGE	: 2500V AC (3.0 SEC)
5. TEMP. RANGE	: -40°C TO 80°C

NOTE:

- '()' REFERENCE DIMENSIONS USUALLY WITHOUT TOLERANCE THAT IS USED FOR INFORMATION PURPOSE ONLY. IT DOES NOT GOVERN PRODUCTION OR INSPECTION OPERATIONS.



Terminal Safely covered by PVC Non shrinkable sleeve with Tape

EXA THERMOMETRICS AN AMPHENOL COMPANY	 SCALE NTS	UNITS mm	sheet 1 OF 1	DRAWING NO:	CUSTOMER:					
				PART NAME: NTC THERMISTOR PROBE ASSEMBLY		CUST. PART NO.:	10.11.25 5 VSN GPM IB			
				ExTi PART NO:	I-2069		SPECIAL CHARACTERISTICS			
					TOTAL NUMBER OF SPECIAL CHARACTERISTICS: SCS - SPECIAL CHARACTERISTICS RELATED TO SAFETY = 0 SCI - SPECIAL CHARACTERISTICS RELATED TO LEGAL AND REGULATORY = 0 SCF - SPECIAL CHARACTERISTICS RELATED TO FUNCTIONS = 0		23.10.20	4	NR	GPM
						DATE	ISSUE	DRAWN	CHECKED	
									APPROVED	

4

3

2

1

