

DMP 304



Industrial Pressure Transmitter for Ultra High Pressure

accuracy according to IEC 60770:
standard: 0.5 % FSO
option: 0.25 % FSO

Nominal pressure

from 0 ... 2 000 bar up to 0 ... 6 000 bar

Output signals

2-wire: 4 ... 20 mA

3-wire: 0 ... 10 V

Special characteristics

- ▶ adjustability of offset and span via front sided potentiometers
- ▶ pressure port 9/16" UNF
- ▶ 80 % calibration signal with MIL / Bendix plug




Optional versions

- ▶ IS-version:
Ex ia
- ▶ accuracy according to IEC 60770:
0.25 % FSO
- ▶ pressure port M20x1.5 and M16x1.5

The ultra-high-pressure transmitter type DMP 304 has been especially designed for applications with highest demand on precision and reliability. DMP 304 series is based on a compensated strain gauge, bonded onto a hardened stainless steel diaphragm.

Due to the rugged stainless steel housing usage under extreme conditions and in IS-required areas is no problem.

Preferred areas of use are

-  High pressure hydraulic circuits
-  Water jet cutting
-  High pressure applications in chemical and petrochemical industry



DMP 304

Ultra High Pressure Transmitter

Technical Data

Input pressure range	
Nominal pressure gauge [bar]	2 000 4 000 5 000 6 000
Overpressure [bar]	3 000 5 000 6 000 7 000
Burst pressure [bar]	4 000 8 000 10 000 10 000
Output signal / Supply	
Standard	2-wire: 4 ... 20 mA / $V_S = 10 \dots 30 V_{DC}$
IS-protection	2-wire: 4 ... 20 mA / $V_S = 10 \dots 28 V_{DC}$
Option 3-wire	3-wire: 0 ... 10 V / $V_S = 14 \dots 36 V_{DC}$
Performance	
Accuracy ¹	standard: $\leq \pm 0.50 \% \text{ FSO}$ option: $\leq \pm 0.25 \% \text{ FSO}$ (on request)
Permissible load	current 2-wire: $R_{max} = [(V_S - V_{S \text{ min}}) / 0.02 \text{ A}] \Omega$ voltage 3-wire: $R_{min} = 10 \text{ k}\Omega$
Influence effects	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / $\text{k}\Omega$
Long term stability	$\leq \pm 0.2 \% \text{ FSO} / \text{year}$ at reference conditions
Response time	< 2.5 msec
Adjustability	Via a front sided potentiometer is an adjustment of the offset possible within the range of $\pm 5 \%$ of the nominal pressure range, without an influence of characteristic curve and accuracy.
¹ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)	
Calibration (only with MIL / Bendix plug)	
Calibration signal accuracy	$\leq \pm 0.25 \% \text{ FSO}$
Calibration	80 % FSO calibration (e.g. for 4 ... 20 mA / 2-wire: signal = $0.8 \cdot 16 \text{ mA} + 4 \text{ mA} = 16.8 \text{ mA}$)
Thermal effects (Offset and Span)	
Thermal error	$\leq \pm 0.2 \% \text{ FSO} / 10 \text{ K}$ in compensated range -20 ... 85 °C
Permissible temperatures	
Permissible temperatures	medium: -40 ... 85 °C electronics / environment: -25 ... 85 °C storage: -40 ... 85 °C
Electrical protection	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Electromagnetic compatibility	emission and immunity according to EN 61326
Mechanical stability	
Vibration	10 g RMS (20 ... 2000 Hz)
Shock	100 g / 11 msec
Materials	
Pressure port / diaphragm	stainless steel 1.4548 (17-4 PH)
Housing	stainless steel 1.4301 (304)
Seals (media wetted)	none (welded version)
Media wetted parts	pressure port, diaphragm
Explosion protection (only for 4 ... 20 mA / 2-wire)	
Approval DX17-DMP 304	IBExU 09 ATEX 1144 X zone 0: II 1G Ex ia IIC T4
Safety technical maximum values	$U_i = 28 \text{ V}$, $I_i = 93 \text{ mA}$, $P_i = 660 \text{ mW}$, $C_i \approx 0 \text{ nF}$, $L_i \approx 0 \mu\text{H}$, the supply connections have an inner capacity of max. 27 nF to the housing
Permissible temperatures for environment	in zone 0: -20 ... 60 °C with p_{atm} 0.8 bar up to 1.1 bar zone 1 and higher: -25 ... 70 °C
Connecting cables (by factory)	cable capacity: signal line/shield as well as signal line/signal line: 160 pF/m cable inductance: signal line/shield as well as signal line/signal line: 1 $\mu\text{H}/\text{m}$
Miscellaneous	
Insulation strength / resistance	standard: insulation strength 100 M Ω @ 35 V IS-version: insulation resistance 100 M Ω @ 35 V_{DC} 100 M Ω @ 500 V_{AC} (relative to housing)
Current consumption	2-wire signal output current: max. 28 mA 3-wire signal output voltage: max. 15 mA
Weight	approx. 260 g
Operational life	10 million load cycles
Installation position	any
CE-conformity	EMC Directive: 2014/30/EU Pressure Equipment Directive: 2014/68/EU (module A)
ATEX Directive	2014/34/EU


DMP 304

Ultra High Pressure Transmitter


Technical Data

Wiring diagrams

2-wire-system (current)

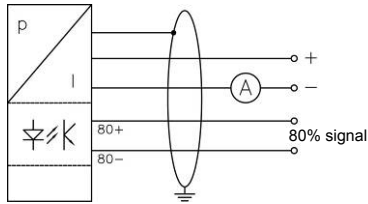

3-wire-system (voltage)

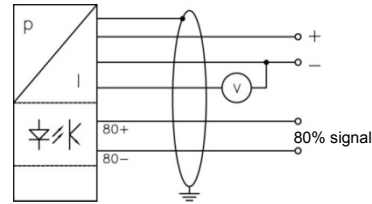


Pin configuration

Electrical connections	Binder 723 (5-pin)	M12x1 (4-pin)	ISO 4400	cable colour (IEC 60757)
Supply +	3	1	1	wh (white)
Supply -	4	2	2	bn (brown)
Signal + (only for 3-wire)	1	3	3	gn (green)
Shield	5	4	pin	gnye (green-yellow)


Pin configuration MIL-/ Bendix plug (optional)

Version	Pin A	Pin B	Pin C	Pin D	Pin E	Pin F
2-wire current signal 4 ... 20 mA	supply +/ signal +	supply -/ signal -	-	-	calibration +	calibration -
3-wire	signal +	supply - / signal - / calibration -	supply +	-	-	calibration +


Electrical connections (dimensions in mm)




Binder series 723 (IP 67)




M12x1 4-pin (IP 67)




cable outlet with PVC-cable (IP 67)²



ISO 4400 (IP 65)



cable outlet (IP 68)³




MIL-/ Bendix plug (type PT 02 A 10-6 P)

² standard: 2 m PVC-cable without air tube (permissible temperature: -5 ... 70 °C)

³ different cable types and lengths available, permissible temperature depends on kind of cable


Mechanical connections (dimensions in mm)

Standard

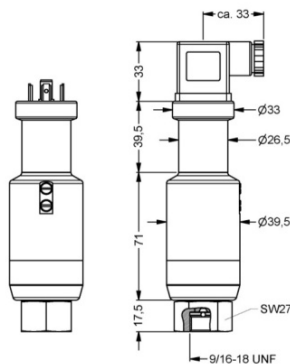


9/16" UNF internal thread

Options

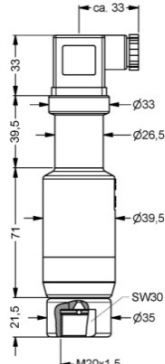

M20x1.5 internal thread

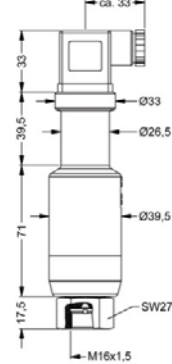

M16x1.5 internal thread

© 2018 BD|SENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

Ordering code DMP 304

DMP 304			□	□	□	□	□	□	□	□	□	□	□	□	□
Pressure															
	gauge		2	2	0										
Input															
	[bar]														
	2 000		2	0	0	4									
	4 000		4	0	0	4									
	5 000		5	0	0	4									
	6 000		6	0	0	4									
	customer		9	9	9	9									consult
Output															
	4 ... 20 mA / 2-wire														1
	Intrinsic safety 4 ... 20 mA / 2-wire														E
	0 ... 10 V / 3-wire														3
	customer														9
															consult
Accuracy															
	standard	0.5 %													5
	option	0.25 %													2
	customer														9
															consult
Electrical connection															
	Male and female plug ISO 4400														1 0 0
	Male plug Binder series 723 (5-pin)														2 0 0
	Cable outlet with PVC-cable ¹														T A 0
	Cable outlet ²														T R 0
	Male plug M12x1 (4-pin), metal														M 1 0
	MIL-/Bendix (type PT 02 A 10-6 P)														B G 0
	customer														9 9 9
															consult
															consult
Mechanical connection															
	9/16" UNF internal thread														V 0 0
	M16x1.5 internal thread														P 0 0
	M20x1.5 internal thread														D 2 8
	customer														9 9 9
															consult
Special version															
	adjustable														0 4 1
	customer														9 9 9
															consult

¹ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C), optionally cable with ventilation tube

² different cable types and lengths deliverable (permissible temperature depends on kind of cable)